


RGB

RGBO with removable end

RGB is a frame for casting or bolting to a wall or floor. It has a standard internal width of 120 mm and is 60 mm deep, available in four standard sizes, 2, 4, 6 & 8. The frame is manufactured 60x60x6 mm angle.

For installations where cables are already in place specify the RGBO frame which has a removable end.

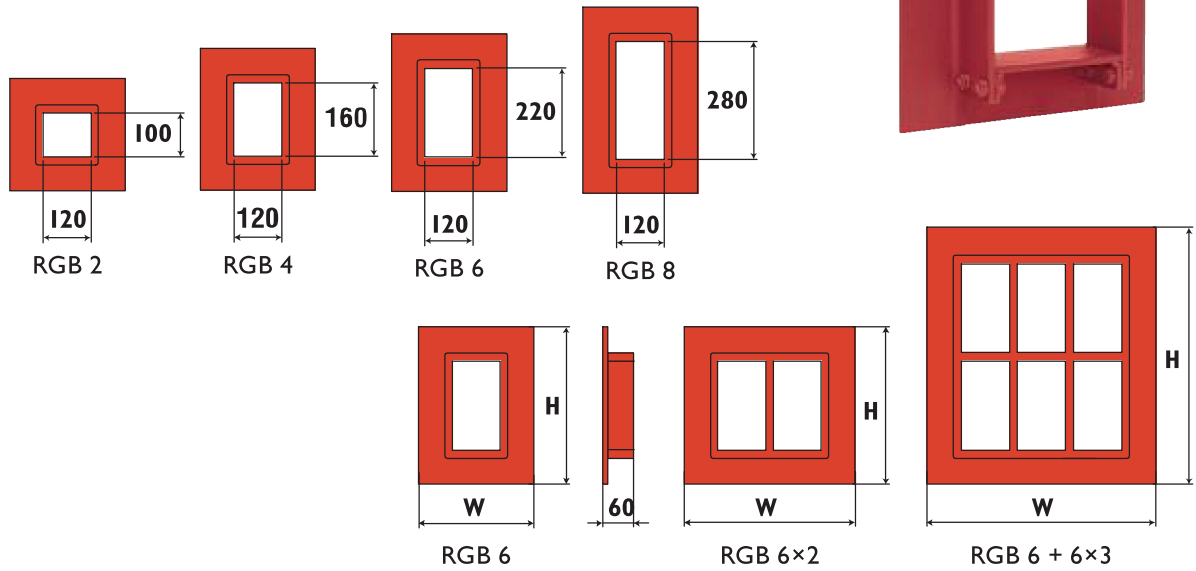

Frame size	Height	Size							Weight					
		W (width) / Multiple frames							x 1	x 2	x 3	x 4	x 5	x 6
		x 1	x 2	x 3	x 4	x 5	x 6	x n						
RGB-2	221	240.5	371	501.5	632	762.5	893	W = 110+ 130.5 x n	3.2	5.1	7.1	9.0	11.0	12.9
RGB-4	279.5	371	501.5	632	762.5	893	3.9		6.1	8.3	10.5	12.7	14.9	
RGB-6	338	371	501.5	632	762.5	893	4.5		6.9	9.4	11.8	14.2	16.7	
RGB-8	396.5	371	501.5	632	762.5	893	5.2		7.9	10.7	13.5	16.2	19.0	
RGB-2+2	332	371	501.5	632	762.5	893	371	5.1	8.1	11.2	14.2	17.2	20.3	
RGB-2+4	390.5	371	501.5	632	762.5	893	371	5.8	9.2	12.7	16.1	19.6	23.0	
RGB-2+6	449	371	501.5	632	762.5	893	371	6.3	10.1	13.9	17.8	21.6	25.4	
RGB-2+8	507.5	371	501.5	632	762.5	893	371	7.1	11.3	15.5	19.7	23.9	28.1	
RGB-4+4	449	371	501.5	632	762.5	893	371	6.3	10.1	13.9	17.8	21.6	25.4	
RGB-4+6	507.5	371	501.5	632	762.5	893	371	7.1	11.3	15.5	19.7	23.9	28.1	
RGB-4+8	566	371	501.5	632	762.5	893	371	7.6	12.1	16.6	21.1	25.6	30.1	
RGB-6+6	566	371	501.5	632	762.5	893	371	7.6	12.1	16.6	21.1	25.6	30.1	
RGB-6+8	624.5	371	501.5	632	762.5	893	371	8.4	13.3	18.3	23.3	28.3	33.3	
RGB-8+8	683	371	501.5	632	762.5	893	371	9.1	14.6	20.1	25.5	31.0	36.4	

All measurements in millimetres. Weight in kilograms.

n = number of frames in width.

Mild Steel
ASTM A36
EN10025 / S235JRG2
BS 4360 gr.40

Stainless Steel
ASTM A316L
BS 970 gr.316

Aluminium
EN AW-6082
BS 1474 gr.6082



This document was created with Win2PDF available at <http://www.daneprairie.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.