

Ⓒ **Wall Box WBOC**

Ⓓ **Wandgehäuse WBOC**



Ⓓ Picture of splice/patch version

Picture of a closed box

Ⓒ Abbildung Version mit Spleissung/Rangierung

Abbildung vom geschlossenen Gehäuse

Ⓒ A compact wall-outlet providing an optical demarcation point for Fiber-to-the-X applications. Mounted on the inside or outside of a building, the optical NID (network interface device) provides physical protection for the transition between provider and customer.

Ⓓ Ein kompaktes Wandgehäuse als Übergabepunkt für FTTX Applikationen. Montage ausserhalb oder innerhalb des Gebäudes, das optische Netzwerkanschlussgerät schützt physikalisch den Übergabepunkt zwischen Anbieter und Kunde.

Ⓒ

**Features**

- extremely compact design
- up to 4 x adapters can be loaded
- multiple cable entry options
- housing with hinged cover (opening 110°)
- cover with snap mechanism and hole for lock
- strain relief fixing options available
- lightweight and robust
- protection class IP 54 (optional IP 64 with sealing)
- wall mounting knockouts for easy fixation
- can be mounted on wall or pole (wood, metal or concrete)
- no additional pole mounting kit necessary

Ⓓ

**Eigenschaften**

- extrem kompaktes Design
- bis zu 4 Kupplungen können eingesetzt werden
- viele Kabeleingänge vorhanden
- Gehäuse mit schwenkbarem Deckel
- Deckel mit Schnappverschluss und Bohrung für Schloss
- Abfangung des zentralen Stützelementes möglich
- leichte und robuste Bauweise
- Schutzklasse IP 54 (optional IP 64 mit Abdichtung)
- Wandmontagelöcher für einfache Montage
- Wand- oder Mastmontagemöglichkeit (Holz, Metall oder Beton)
- kein Mastmontagekit nötig

**WAIVER**

While the information contained in this folder has been carefully compiled to the best of our present knowledge, it is not intended as representation or warranty of any kind on our part regarding the suitability of the products concerned for any particular use or purpose and neither shall any statement contained herein be construed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The suitability of each product for any particular purpose must be checked beforehand with our specialists.

GB

**3 different configurations can be achieved**

- Splice through (for splicing fibers from multiple cables)
- Splice/Patch (for splicing pigtails to incoming cable)
- Patch through (as a junction box for pre-terminated cables)

D

**3 verschiedene Konfigurationsmöglichkeiten**

- Durchspleissung (Spleissen von verschiedenen Kabeln)
- Spleissung / Rangierung (Pigtailspleissen auf ankommende Kabel)
- Durchrangierung (Verbindungsbox für vorgefertigte Kabel)

GB

Technical data	Value
Dimensions (WxHxD)	137 x 173 x 87 mm
Materials	housing - ABS, cover - glass fiber reinforced polyester, grommets - polyethylene, screws - stainless steel
Weight	approx. 470 g *
Colours	housing - black, cover – grey, grommets – black
Order code	see table below

\* depending on the configuration.

D

Technische Daten	Wert
Dimensionen (BxHxT)	137 x 173 x 87 mm
Material	Gehäuse - ABS, Deckel – glasfaserverstärkter Polyester, Kabeleingänge - Polyethylen, Schrauben - Stahl
Gewicht	ca. 470 g *
Farben	Gehäuse - schwarz, Deckel – grau, Kabeleingänge – schwarz
Bestellcode	siehe Tabelle unten

\* hängt von der Konfiguration ab.

**WAIVER**

While the information contained in this folder has been carefully compiled to the best of our present knowledge, it is not intended as representation or warranty of any kind on our part regarding the suitability of the products concerned for any particular use or purpose and neither shall any statement contained herein be construed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The suitability of each product for any particular purpose must be checked beforehand with our specialists.



HUBER+SUHNER AG  
 Fiber Optics Division  
 CH-9100 Herisau  
 Phone +41 (0)71 353 41 11  
 Fax +41 (0)71 353 46 47  
 www.hubersuhner.com/lisa

Document No.: **01.05.L356** Modification No.: **b**  
 Issued: **24.11.2005 / 4960** Last amended: **09.12.2005 / THS**  
 Checked/released: **24.11.2005 / 4573** Page **2 of 4**

GB

Ordering Code	Description
WBOC-	Wallbox Outdoor Compact
00/	Adapter code
00-	Splice through variant
09-	Singlemode 9µm
50-	Multimode 50µm
60-	Multimode 62.5µm
nn/	Number of adapters (00 if empty)
nn-	Number of pigtails (00 if empty)
SW0-	Sandwich splice holder (for max. 12 splices)
HS0-	Heatshrink splice holder (for max. 6 splices)
A1	Standard variant

### Examples

WBOC- 70/ 09- 04/ 04- HS0- A1	WBOC with 4 x SC/PC SM adapters & pigtails
WBOC- 70/ 00- 00/ 00- HS0- A1	WBOC with heat shrink splice holder for splice through
WBOC- 70/ 50- 04/ 00- HS0- A1	WBOC with 4 x SC MM adapters for patch through

D

Bestellcode	Beschreibung
WBOC-	Aussenwandgehäuse Kompakt
00/	Kupplungscode
00-	Durchspleissung
09-	Singlemode 9µm
50-	Multimode 50µm
60-	Multimode 62.5µm
nn/	Anzahl Kupplungen (00 ohne)
nn-	Anzahl Pigtails (00 ohne)
SW0-	Sandwich-Spleisshalter (für max. 12 Spleisse)
HS0-	Schrumpf-Spleisshalter (für max. 6 Spleisse)
A1	Standardvariante

### Beispiele

WBOC- 70/ 09- 04/ 04- HS0- A1	WBOC mit 4 x SC/PC SM Kupplungen und Pigtails
WBOC- 70/ 00- 00/ 00- HS0- A1	WBOC mit Schrumpf-Spleisshalter für Durchspleissung
WBOC- 70/ 50- 04/ 00- HS0- A1	WBOC mit 4 x SC MM Kupplungen für Durchrangierung

GB

Note: The WBOC is supplied with an integrated adapter plate as standard. The adapter plate will be supplied to suit an SC footprint as standard unless otherwise stated.

D

Anmerkung: Die WBOC ist standardmässig mit einer integrierten Kupplungsplatte ausgerüstet. Die Kupplungsplatte wird als SC-Version ausgeliefert, wenn nichts anderes definiert wird.

#### WAIVER

While the information contained in this folder has been carefully compiled to the best of our present knowledge, it is not intended as representation or warranty of any kind on our part regarding the suitability of the products concerned for any particular use or purpose and neither shall any statement contained herein be construed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The suitability of each product for any particular purpose must be checked beforehand with our specialists.



HUBER+SUHNER AG  
Fiber Optics Division  
CH-9100 Herisau  
Phone +41 (0)71 353 41 11  
Fax +41 (0)71 353 46 47  
www.hubersuhner.com/lisa

Document No.: **01.05.L356**  
Issued: 24.11.2005 / 4960  
Checked/released: 24.11.2005 / 4573

Modification No.: **b**  
Last amended: 09.12.2005 / THS  
Page 3 of 4

Adapter code / Kupplungscode	Type / Typ
00	No adapter / Keine Kupplung
70	FSC
73	FSC APC 8°
80	LX.5
81	LX.5 duplex
83	LX.5 APC
84	LX.5 APC duplex
85	LC
86	LC APC
88	LC duplex
89	LC APC duplex
90	FLSH (E2000)
93	FLSH (E2000) APC

**(GB) Scope of supply**


- 1 x housing and hinged cover
- 1 x base plate with integrated adapter plate with 4 x SC footprint
- 2 x self adhesive cable management clips
- optional splice holder depending on ordering code
- optional adaptors depending on ordering code
- optional pigtails depending on ordering code

**(D) Lieferumfang**

- 1 x Gehäuse und Deckel
- 1 x Basisplatte mit integrierter Kupplungsplatte mit 4 x SC Anschlussausparung
- 2 x selbstklebende Kabelführungsklammern
- optional Spleisshalter je nach Bestellcode
- optional Kupplungen je nach Bestellcode
- optional Pigtails je nach Bestellcode

**(GB) Cable entry options**

- 2 x for cable up to Ø 15mm
- 3 x for cable up to Ø 13mm
- 1 x for cable up to Ø 9mm
- 6 x for cable up to Ø 5mm

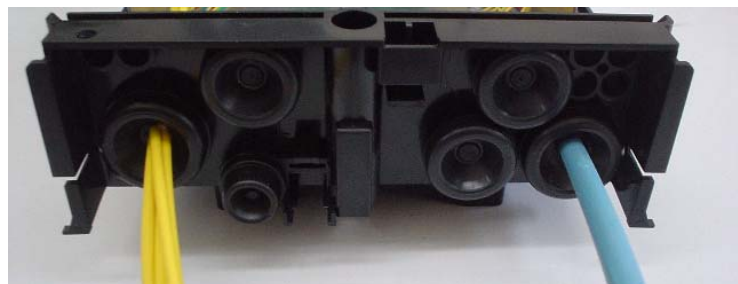

**(D) Kabeleinführungsoptionen**

- 2 x für Kabel bis zu Ø 15mm
- 3 x für Kabel bis zu Ø 13mm
- 1 x für Kabel bis zu Ø 9mm
- 6 x für Kabel bis zu Ø 5mm

**WAIVER**

While the information contained in this folder has been carefully compiled to the best of our present knowledge, it is not intended as representation or warranty of any kind on our part regarding the suitability of the products concerned for any particular use or purpose and neither shall any statement contained herein be construed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The suitability of each product for any particular purpose must be checked beforehand with our specialists.